


# Düsenrückschlagventil

## Soupape de retenue à corps tuyère

Type V119

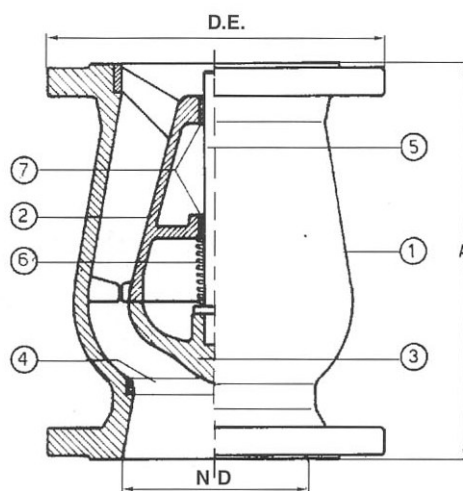

**DN : 40 - 250**  
**PN : 63**

**Matériel:**

- |                  |                          |
|------------------|--------------------------|
| 1. corps         | GS-400 +traitement époxy |
| disque           | acier inoxydable         |
| 2. ressort       | 1.4301                   |
| 3. guidage d'axe | 1.4408                   |
| 4. douille       | bronze                   |
| 5. axe           | 1.4301                   |

**Installation :**

Respectez les distances amont aval de min. 3D

**DN: 40 - 250**  
**PN: 63**

**Material:**

- |                  |                             |
|------------------|-----------------------------|
| 1. Gehäuse       | GS-400 + Epoxy Beschichtung |
| Scheibe          | Chromstahl                  |
| 2. Feder         | 1.4301                      |
| 3. Führungswelle | 1.4408                      |
| 4. Hülse         | Bronze                      |
| 5. Achse         | 1.4301                      |

**Einbau:**

beidseitigen Montageabstand von min. 3D einhalten

DN	A (mm)	kg
40	120	12
50	120	12
65	150	16
80	180	16
100	240	26
125	300	46
150	350	75
200	400	125
250	450	150